

6.7GHz-7.2GHz 3W VTX Module

Specification

DESCRIPTION: VT_x


MODEL: RFVTX-T67

IMAGE:



1 Introduce

The RFVTX-T67 has 5 adjustable power levels (25/200/500/1000/3000 mW), is equipped with an intelligent audio system for smooth frequency and power adjustment, and features a built-in cooling fan for optimal temperature management. Supporting 64 channels in the 6–7 GHz frequency range, the RFVTX-T67 offers maximum flexibility in signal selection. Its SMA antenna connector ensures a stable connection, and integration with an on-screen menu simplifies setup.

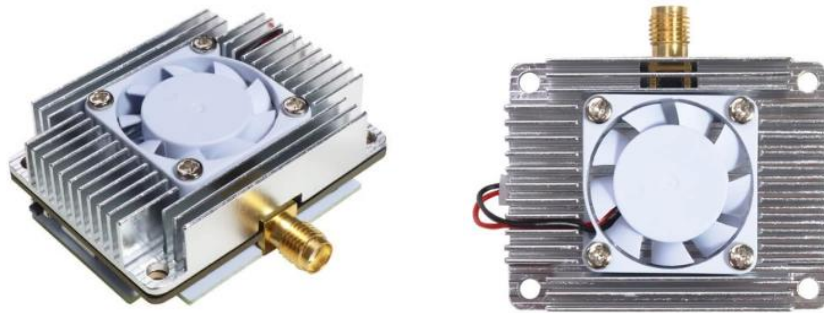

2 Frequency Table (64CH)

Unit: Mhz

Channel Band	CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
BAND A	6110	6130	6150	6170	6190	6210	6230	6250
BAND B	6270	6290	6310	6330	6350	6370	6390	6410
BAND E	6430	6450	6470	6490	6510	6530	6550	6570
BAND F	6590	6610	6630	6650	6670	6690	6710	6730
BAND R	6750	6770	6790	6810	6830	6850	6870	6890
BAND P	6910	6930	6950	6970	6990	7010	7030	7050
BAND H	7070	7090	7110	7130	7150	7170	7190	7210
BAND U	6115	6265	6425	6585	6745	6905	7065	7185

3 Specifications

Item	Spec.
Input Voltage	8V - 48V
Antenna Connector	SMA
Cable Connector	JST, 6pin
Dimensions	47(W) x 36 (D) mm
Kit Contents	1 x VTX, 1 x Cable